




Lightweight Steel Wheels



Lightweight Steel Wheels
with Patented Rim Contour

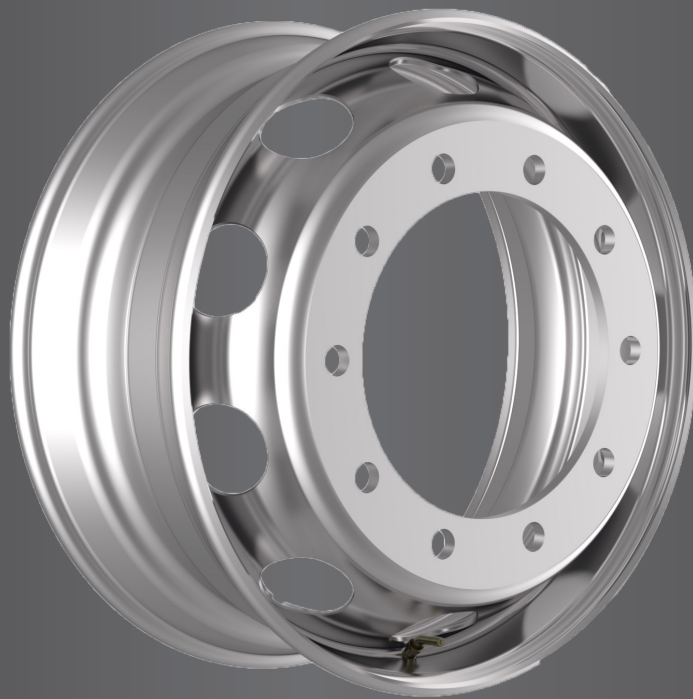


A new generation of steel wheels.

Accuride is pleased to introduce its new generation of lightweight steel wheels in Europe. These wheels are designed to fit the truck and bus industry.

Removal of Safety Hump

Red line: New Design
Blue line: Old Design

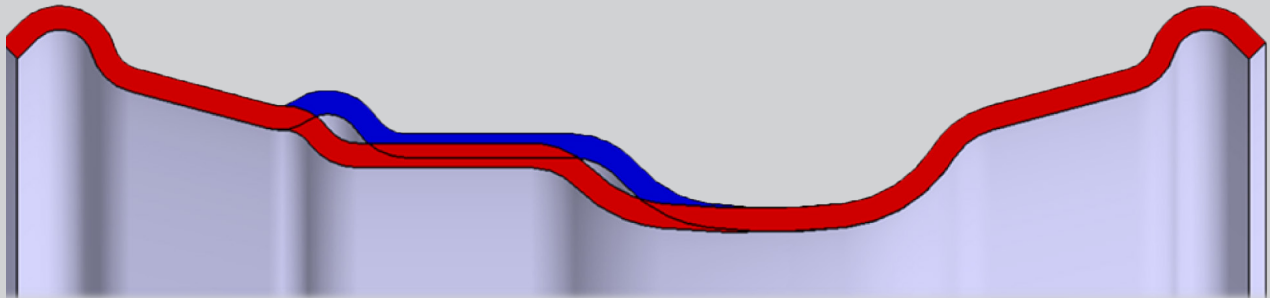

3,5 kilos weight reduction on the 22.5 x 9.00 per wheel in comparison with previous hump designs creates up to 35 kilos weight reduction per truck.

4 kilos weight reduction on the 22.5 x 8.25 per wheel in comparison with previous hump designs and nominal load increase by 200kg to 3750kg for bus applications.

FEATURES

Characteristics	Benefits
New design with optimized profile	Fatigue life improvement
TPMS compatible	Weight saving and lower emissions
Valve protected design	Higher possible payload
Liquid top coat over epoxy e-coat	Easier tyre mounting

SPECIFICATIONS

Wheel Size	Part Number	Center Hole	Pitch Circle	Number of Stud Holes	Bolt Hole (mm)	Inset (mm)	Offset (mm)	Weight (kg)	Max Load (kg)	Valve
22.5 x 8.25	15143	281	335	10	M22	152.5	165	33.5	3.750	V3-22-1
22.5 x 8.25	15144	281	335	10	M22	157.5	170	34.0	3.750	V3-22-1
22.5 x 9.00	15145	281	335	10	M22	162.5	175	34.5	4.000	V3-22-1

Your only single source for industry-leading wheel end solutions.

STEEL & ALUMINUM WHEELS | DRUMS | HUBS | ROTORS | SLACK ADJUSTERS

For more information: +49 (0) 212 701 2212 | accuridecorp.com

Accuride | 7140 Office Circle | Evansville, IN 47715 USA

